
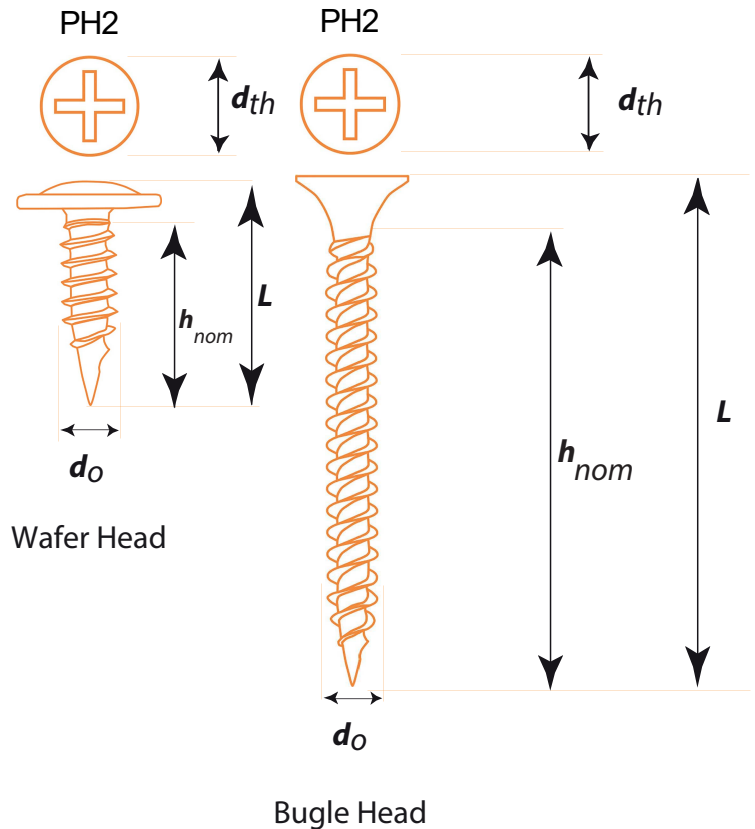


## Drywall Screws Bugle / Wafer Head BZP



**The FFX Dry Wall Screw** is a case hardened Drywall Screw. It features a Twin Thread for increased pull out loading. The Bugle Head helps to prevent damage to the finished surface. The Sharp 25° point also avoids pre-drilling into Metals. The Wafer Head creates a large clamp down area when stitching drywall track or ceiling track together. A designed point avoids pre-drilling into Metals..

- Case hardened Drywall Screw
- Twin Thread for increased pull out loading
- The Bugle Head helps to prevent damage to the finished surface
- Sharp 25° point avoids pre-drilling into Metals
- Bright zinc plating withstands up to 50 hours of salt spray testing.
- Surface hardened up to 800 HV preventing shearing under torque, Core hardened up to 450HV.

**Application** For fixing dry lining to light steel section

STEEL C-1028/C-1022 Bright Zinc Plated, between 3 to 5 microns.

**Packaging:**



## Technical data



Product Code	Screw Dia x Length (mm)	Driver Bit Size	d <sub>th</sub> (mm)	h <sub>nom</sub> (mm)	L (mm)	D <sub>o</sub> (mm)	Angle Point	Pack Size
HH0113000010	3.5 x 25	PH2	7.80	Full	25	3.50	25°	1000
HH0113000020	3.5 x 32	PH2	7.80	Full	32	3.50	25°	1000
HH0113000030	3.5 x 38	PH2	7.80	Full	38	3.50	25°	1000
HH0113000040	3.5 x 42	PH2	7.80	Full	42	3.50	25°	1000
HH0113000050	3.5 x 50	PH2	7.80	Full	50	3.50	25°	500
HH0113000060	4.2 x 65	PH2	7.90	50.0	65	4.20	25°	500
HH0113000070	4.2 x 75	PH2	7.90	50.0	75	4.20	25°	250
HH0113000080	4.2 x 13	PH2	7.90	Full	13	4.20	25°	1000