


Drywall Screws BPH - Coarse Thread

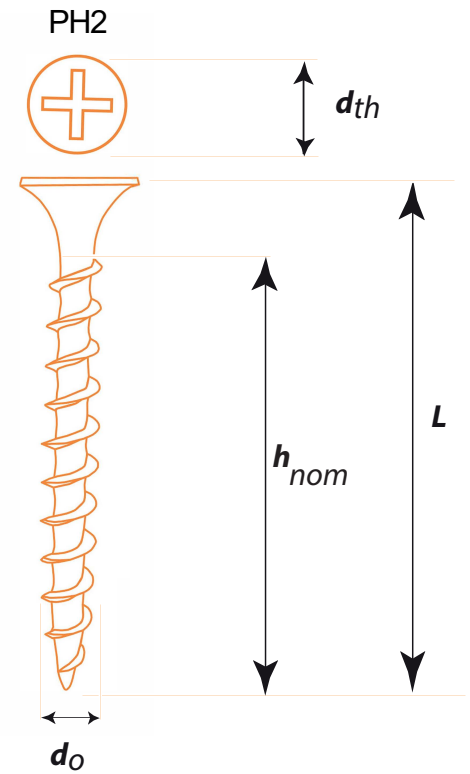

The FFX Drywall Screw with bugle head helps to prevent damage to the fixture surface. The single coarse thread allows smooth penetration into the base material. Its sharp point ensures easy take up into wood, chipboard and MDF.

- The Drywall screw with bugle head helps to prevent damage to the fixture surface.
- The single coarse thread allows smooth penetration into base material.
- The Bugle Head helps to prevent damage to the finished surface.
- Its sharp point ensures easy take up into wood, chipboard and MDF.
- Black Phosphate plating withstands up to 50 hours of salt spray testing.
- Surface hardened up to min 500 HV preventing shearing under torque, Core hardened up to 450HV.

Application

For fixing dry lining to timber section.

Material :STEEL C-1018/C-1022 Black Phosphate plating, between 3 to 5 microns.

Packaging:



Technical data



Product Code	Screw Dia x Length (mm)	Driver Bit Size	d _{th} (mm)	h _{nom} (mm)	L (mm)	D _o (mm)	Angle Point	Pack Size
HH0113000210	3.5 x 25	PH2	7.80	Full	25	3.50	25°	1000
HH0113000220	3.5 x 32	PH2	7.80	Full	32	3.50	25°	1000
HH0113000230	3.5 x 38	PH2	7.80	Full	38	3.50	25°	1000
HH0113000240	3.5 x 42	PH2	7.80	Full	42	3.50	25°	1000
HH0113000250	3.5 x 50	PH2	7.80	Full	50	3.50	25°	1000
HH0113000260	4.2 x 65	PH2	7.90	50.0	65	4.20	25°	500
HH0113000270	4.2 x 75	PH2	7.90	50.0	75	4.20	25°	500
HH0113000280	4.2 x 100	PH2	7.90	60.0	100	4.20	25°	500