
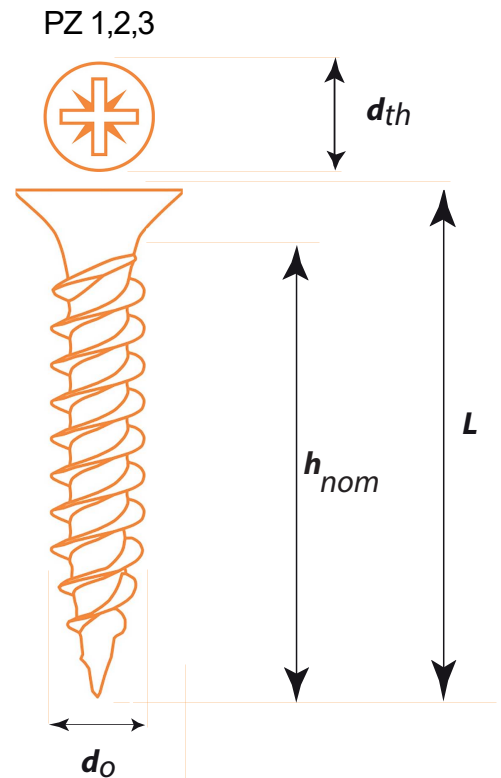


Twin Threaded CSK Woodscrews, Pozi drive, BZP

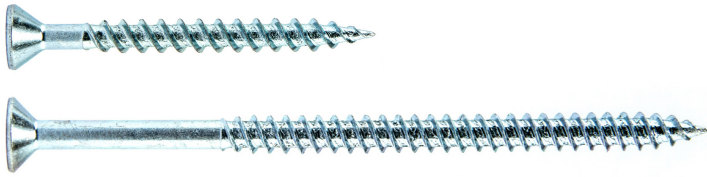

The FFX Twin Threaded CSK Woodscrew. Case hardened woodscrew with pozi drive recess head. It's Twin Thread enables faster installation with greater pull out loadings. The Sharp point ensures fast and accurate drilling.

- Double countersunk Pozi recess head for improved head shear resistance.
- Case hardened for extra strength and durability.
- Twin Thread enables faster installation with greater pull out loadings.
- Sharp point for fast and accurate drilling.
- Multi-purpose screw for use in Chipboard, MDF, Softwood and Hardwood.
- Surface hardened up to 800 HV preventing shearing under torque, Core hardened up to 450HV.

Application Various applications,
Multi-Purpose Screw

Material Steel:C-1018/C-1022 Bright Zinc Plated, between 3 to 5 microns

Packaging:



Technical data



Product Code	Screw Dia x Length (Inch)	Driver Bit Size	d_{th} (mm)	h_{nom} (mm)	L (mm)	D_o (mm)	Angle Point	Pack Size Box
HH0111900010	4 x 1/2	PZ1	5.40	8.04	12	3.00	28°	200
HH0111900020	4 x 5/8	PZ1	5.40	10.72	16	3.00	28°	200
HH0111900030	4 x 3/4	PZ1	5.40	13.40	20	3.00	28°	200
HH0111900040	4 x 1	PZ1	5.40	16.75	25	3.00	28°	200
HH0111900050	6 x 1/2	PZ2	6.75	8.04	12	3.50	28°	200
HH0111900060	6 x 5/8	PZ2	6.75	10.72	16	3.50	28°	200
HH0111900070	6 x 3/4	PZ2	6.75	13.40	20	3.50	28°	200
HH0111900080	6 x 1	PZ2	6.75	16.75	25	3.50	28°	200
HH0111900090	6 x 1 1/4	PZ2	6.75	20.10	30	3.50	28°	200
HH0111900100	6 x 1 1/2	PZ2	6.75	26.80	40	3.50	28°	200
HH0111900110	6 x 2	PZ2	6.75	33.50	50	3.50	28°	200
HH0111900120	7 x 3/4	PZ2	7.45	13.40	20	3.90	28°	200
HH0111900130	7 x 1	PZ2	7.45	16.75	25	3.90	28°	200
HH0111900140	7 x 1 1/4	PZ2	7.45	20.10	30	3.90	28°	200
HH0111900150	7 x 1 1/2	PZ2	7.45	26.80	40	3.90	28°	200
HH0111900160	8 x 1/2	PZ2	8.15	8.04	12	4.00	28°	200
HH0111900170	8 x 5/8	PZ2	8.15	10.72	16	4.00	28°	200
HH0111900180	8 x 3/4	PZ2	8.15	13.40	20	4.00	28°	200
HH0111900190	8 x 1	PZ2	8.15	16.75	25	4.00	28°	200
HH0111900200	8 x 1 1/4	PZ2	8.15	20.10	30	4.00	28°	200
HH0111900210	8 x 1 1/2	PZ2	8.15	26.80	40	4.00	28°	200
HH0111900220	8 x 1 3/4	PZ2	8.15	30.15	45	4.00	28°	200
HH0111900230	8 x 2	PZ2	8.15	33.50	50	4.00	28°	200
HH0111900240	8 x 2 1/4	PZ2	8.15	38.19	57	4.00	28°	200
HH0111900250	8 x 2 1/2	PZ2	8.15	40.20	60	4.00	28°	200
HH0111900260	8 x 3	PZ2	8.15	50.25	75	4.00	28°	200
HH0111900270	10 x 3/4	PZ2	9.50	13.40	20	5.00	28°	200
HH0111900280	10 x 1	PZ2	9.50	16.75	25	5.00	28°	200
HH0111900290	10 x 1 1/4	PZ2	9.50	20.10	30	5.00	28°	200
HH0111900300	10 x 1 1/2	PZ2	9.50	26.80	40	5.00	28°	200
HH0111900310	10 x 1 3/4	PZ2	9.50	30.15	45	5.00	28°	200
HH0111900320	10 x 2	PZ2	9.50	33.50	50	5.00	28°	200
HH0111900330	10 x 2 1/4	PZ2	9.50	38.19	57	5.00	28°	200
HH0111900340	10 x 2 1/2	PZ2	9.50	40.20	60	5.00	28°	200
HH0111900350	10 x 3	PZ2	9.50	50.25	75	5.00	28°	100
HH0111900360	10 x 3 1/2	PZ2	9.50	60.30	90	5.00	28°	100
HH0111900370	10 x 4	PZ2	9.50	67.00	100	5.00	28°	100
HH0111900380	12 x 1 1/4	PZ3	10.90	20.10	30	6.00	28°	200
HH0111900390	12 x 1 1/2	PZ3	10.90	26.80	40	6.00	28°	200
HH0111900400	12 x 2	PZ3	10.90	33.50	50	6.00	28°	200
HH0111900410	12 x 2 1/2	PZ3	10.90	40.20	60	6.00	28°	200
HH0111900420	12 x 3	PZ3	10.90	50.25	75	6.00	28°	200
HH0111900430	12 x 3 1/2	PZ3	10.90	60.30	90	6.00	28°	100
HH0111900440	12 x 4	PZ3	10.90	67.00	100	6.00	28°	100