
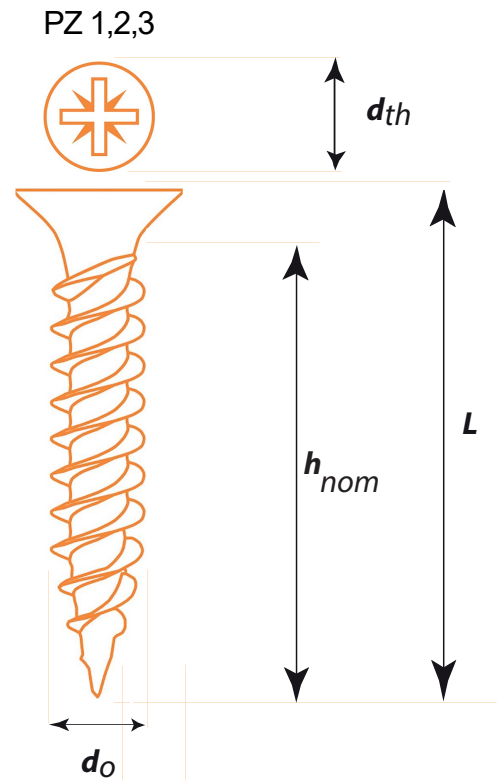


Twin Threaded CSK Woodscrews, Pozi drive, BZP

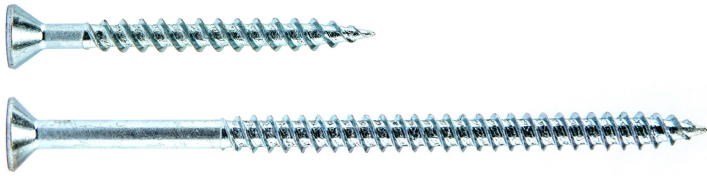

The FFX Twin Threaded CSK Woodscrew. Case hardened woodscrew with pozi drive recess head. It's Twin Thread enables faster installation with greater pull out loadings. The Sharp point ensures fast and accurate drilling.

- Double countersunk Pozi recess head for improved head shear resistance.
- Case hardened for extra strength and durability.
- Twin Thread enables faster installation with greater pull out loadings.
- Sharp point for fast and accurate drilling.
- Multi-purpose screw for use in Chipboard, MDF, Softwood and Hardwood.
- Surface hardened up to 800 HV preventing shearing under torque, Core hardened up to 450HV

Application Various applications,
Multi-Purpose Screw

Material
STEEL C-1018/C-1022 Bright Zinc Plated, between 3 to 5 microns.

Packaging:



Technical data



Product Code	Screw Dia x Length (Inch)	Driver Bit Size	d _{th} (mm)	h _{nom} (mm)	L (mm)	D _o (mm)	Angle Point	Pack Size Tub
HH0111900600	8 x 1 1/2	PZ2	8.15	26.80	40	4.00	28°	1000
HH0111900610	8 x 2	PZ2	8.15	33.50	50	4.00	28°	1000
HH0111900620	10 x 1 1/2	PZ2	9.50	26.80	40	5.00	28°	1000
HH0111900630	10 x 2	PZ2	9.50	33.50	50	5.00	28°	1000
HH0111900640	10 x 2 1/2	PZ2	9.50	40.20	60	5.00	28°	1000
HH0111900650	10 x 3	PZ2	9.50	50.25	75	5.00	28°	1000
HH0111900660	10 x 4	PZ2	9.50	67.00	100	5.00	28°	1000
HH0111900670	12 x 2	PZ3	10.90	33.50	50	6.00	28°	1000
HH0111900680	12 x 3	PZ3	10.90	50.25	75	6.00	28°	1000
HH0111900690	12 x 4	PZ3	10.90	67.00	100	6.00	28°	1000