




Hitech Double CSK Head Multi-purpose screw, Pozi drive, ZYP



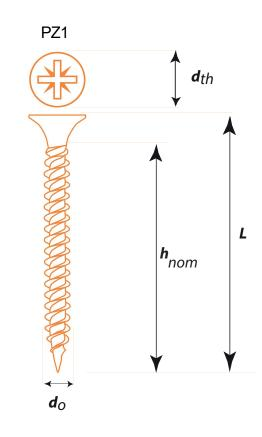

The FFX Hitech Double CSK Head Multi-Purpose Screw. Hitech case hardened Multi-Purpose screws, with a double countersunk pozi recess head, for improved head shear resistance. Sharp 28° point enables easy penetration into all recommended substrates

- Double countersunk pozi recess head for improved head shear resistance.
- Case hardened for extra strength and durability.
- Sharp 28° point enables easy penetration into all recommended substrates.
- Fully threaded up to 70mm.
- Multi-purpose screw for use in Thin Sheet Metal, PVCu , Chipboard, MDF, Softwood and Hardwood.
- Surface hardened up to 800 HV preventing shearing under torque, Core hardened up to 450HV

Application Various applications, Multi-Purpose Screw

Material

STEEL C-1018/C-1022 Yellow Zinc Plated, between 3 to 5 Microns.

Packaging:





Technical data





Product Code	Screw Dia x Length (mm)	Driver Bit Size	d th (mm)	h nom (mm)	L (mm)	D₀ (mm)	Angle Point	Pack Size Box
HH0112600010	3.0 x 12	PZ1	6.00	Full	12	3.00	28°	200
HH0112600020	3.0 x 15	PZ1	6.00	Full	15	3.00	28°	200
HH0112600030	3.0 x 17	PZ1	6.00	Full	17	3.00	28°	200
HH0112600040	3.0 x 20	PZ1	6.00	Full	20	3.00	28°	200
HH0112600050	3.0 x 25	PZ1	6.00	Full	25	3.00	28°	200
HH0112600060	3.0 x 30	PZ1	6.00	Full	30	3.00	28°	200
HH0112600070	3.5 x 12	PZ2	7.00	Full	12	3.50	28°	200
HH0112600080	3.5 x 15	PZ2	7.00	Full	15	3.50	28°	200
HH0112600090	3.5 x 17	PZ2	7.00	Full	17	3.50	28°	200
HH0112600100	3.5 x 20	PZ2	7.00	Full	20	3.50	28°	200
HH0112600110	3.5 x 25	PZ2	7.00	Full	25	3.50	28°	200
HH0112600120	3.5 x 30	PZ2	7.00	Full	30	3.50	28°	200
HH0112600130	3.5 x 35	PZ2	7.00	Full	35	3.50	28°	200
HH0112600140	3.5 x 40	PZ2	7.00	Full	40	3.50	28°	200
HH0112600150	4.0 x 15	PZ2	8.00	Full	15	4.00	28°	200
HH0112600160	4.0 x 17	PZ2	8.00	Full	17	4.00	28°	200
HH0112600170	4.0 x 20	PZ2	8.00	Full	20	4.00	28°	200
HH0112600180	4.0 x 25	PZ2	8.00	Full	25	4.00	28°	200
HH0112600190	4.0 x 30	PZ2	8.00	Full	30	4.00	28°	200
HH0112600200	4.0 x 35	PZ2	8.00	Full	35	4.00	28°	200
HH0112600210	4.0 x 40	PZ2	8.00	Full	40	4.00	28°	200
HH0112600220	4.0 x 45	PZ2	8.00	Full	45	4.00	28°	200
HH0112600230	4.0 x 50	PZ2	8.00	Full	50	4.00	28°	200
HH0112600240	4.0 x 50	PZ2	8.00	Full	60	4.00	28°	200
HH0112600240	4.0 x 70	PZ2	8.00	Full	70	4.00	28°	200
		PZ2 PZ2	9.00	Full	20	4.00	28°	200
HH0112600260	4.5 x 20	PZ2 PZ2		Full	35		28°	200
HH0112600270	4.5 x 35		9.00			4.50	28°	
HH0112600280	4.5 x 45	PZ2	9.00	Full	45	4.50		200
HH0112600290	4.5 x 50	PZ2	9.00	Full	50	4.50	28°	200
HH0112600300	4.5 x 60	PZ2	9.00	Full	60	4.50	28°	200
HH0112600310	4.5 x 70	PZ2	9.00	Full	70	4.50	28°	200
HH0112600320	5.0 x 25	PZ2	10.0	Full	25	5.00	28°	200
HH0112600330	5.0 x 30	PZ2	10.0	Full	30	5.00	28°	200
HH0112600340	5.0 x 35	PZ2	10.0	Full	35	5.00	28°	200
HH0112600350	5.0 x 40	PZ2	10.0	Full	40	5.00	28°	200
HH0112600360	5.0 x 45	PZ2	10.0	Full	45	5.00	28°	200
HH0112600370	5.0 x 50	PZ2	10.0	Full	50	5.00	28°	200
HH0112600380	5.0 x 60	PZ2	10.0	Full	60	5.00	28°	100
HH0112600390	5.0 x 70	PZ2	10.0	Full	70	5.00	28°	100
HH0112600400	5.0 x 80	PZ2	10.0	70.0	80	5.00	28°	100
HH0112600410	5.0 x 90	PZ2	10.0	70.0	90	5.00	28°	100
HH0112600420	5.0 x 100	PZ2	10.0	70.0	100	5.00	28°	100
HH0112600430	6.0 x 35	PZ3	12.0	Full	35	6.00	28°	100
HH0112600440	6.0 x 40	PZ3	12.0	Full	40	6.00	28°	100
HH0112600450	6.0 x 50	PZ3	12.0	Full	50	6.00	28°	100
HH0112600460	6.0 x 60	PZ3	12.0	Full	60	6.00	28°	100
HH0112600470	6.0 x 70	PZ3	12.0	Full	70	6.00	28°	100
HH0112600480	6.0 x 80	PZ3	12.0	70.0	80	6.00	28°	100
HH0112600490	6.0 x 90	PZ3	12.0	70.0	90	6.00	28°	100
HH0112600500	6.0 x 100	PZ3	12.0	70.0	100	6.00	28°	100
HH0112600510	6.0 x 120	PZ3	12.0	70.0	120	6.00	28°	100
HH0112600520	6.0 x 130	PZ3	12.0	70.0	130	6.00	28°	100
HH0112600530	6.0 x 140	PZ3	12.0	70.0	140	6.00	28°	100
HH0112600540	6.0 x 150	PZ3	12.0	70.0	150	6.00	28°	100